



CODE ZERO
SUSPENDED



DE LED-Pendelleuchte. Direkt-indirekt oder rein direkt-strahlend. Opaldiffusor aus satiniertem Acrylglas. Leuchtenkorpus aus elliptisch geformtem Aluminiumprofil wahlweise weiß, silber, graphit, schwarz, titan oder kupferfarben lackiert. Proportionsverhältnis Länge zu Breite 2:1. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Standard-Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K, alternativ Tunable-White (2700K-6500K). Binning initial \leq MacAdam 3. Farbwiedergabe Ra>80, alternativ Ra>90. Seilpendel-Set mit transparent, rot, oder schwarz ummantelter Zuleitung.

EN Suspended LED Light. Direct-indirect or direct only light distribution. Opal diffuser made of satin acrylic glass for general lighting. Luminaire body made of elliptically shaped aluminum profile optionally available in white, silver, graphite, black, titanium or copper colours. Proportion ratio length to width 2:1. Converter integrated in luminaire housing, optional switched or dimmed (1-10V, DALI, Touch-Dim, Casambi). Standard colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K, and alternatively with Tunable-White (2700K-6500K). Binning initial \leq MacAdam 3. Colour rendering CRI> 80, alternative CRI> 90. For installation with cord suspension. Transparent, red or black sheathed supply line available.


FR Luminaire en suspension LED. Éclairage DIR-IND ou uniquement direct. Diffuseur opale en verre acrylique satiné. Corps du luminaire - profilé aluminium en forme d'ellipse d'un seul tenant disponible en blanc, argent, graphite, noir, titane ou cuivre laqué. Proportion entre longueur et largeur 2:1. Convertisseur intégré dans le corps du luminaire, allumage simple ou gradable au choix (1-10V, DALI, Touch-Dim, Casambi). Températures de couleur standard 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K, alternative Tunable-White (2700K-6500K). Binning \leq MacAdam 3. Rendu des couleurs IRC> 80, IRC> 90 sur demande. Kit de filins-suspensions avec câble d'alimentation transparent, habillé rouge ou noire au choix.

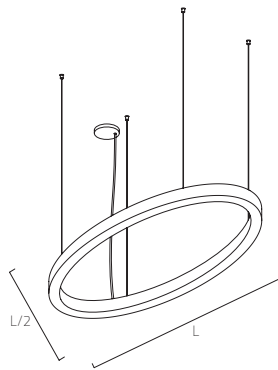

PRODUCT-CODE: Z P2 O S D - 8 30 M - L1500 - K


PRODUCT FAMILY	Z: Code Zero
TYPE	P2: Direct-Indirect, G2: Direct-Only
OPTICAL SYSTEM	O: Opal
SURFACE FINISH	W: Snow White, V: Ivory White,
	S: Radiant Silver, U: Urban Graphite, B: Jet Black,
	T: Satin Titanium, K: Satin Copper
	E: On/Off, L: DALI, D: 1-10V, H: Touch-Dim, C: Casambi
	8: CRI>80, 9: CRI>90
COLOUR TEMP.	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K,
	65: 6500K, TW: Tunable White 2700-6500K
POWER	M: Medium Power, H: High Power
SIZE	Luminaire Length in mm: L1500, L2000, L3000
SUSPENSION	K: Parallel Suspension
OPTIONAL	Cable colour Red or Black

OPAL DIFFUSER / DIRECT



Size	Lumen/Watt Medium Power
L1500	6500lm/88W
L2000	9000lm/120W
L3000	13510lm/179W

OPAL DIFFUSER / DIRECT-INDIRECT



Size	Lumen/Watt Medium Power
L1500	16050lm/163W
L2000	22890lm/228W
L3000	35200lm/345W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

