

EFIT

— By Alegre Design —



1 SYNCHRO MECHANISM

In order to adjust manually and adapt the tension to each user's requirement there is a knob underneath of the seat **(A)**.

EFIT includes 4 back tilt positions offering tilting angles from 0° when chair is on up-right blocked position up to 30°. To adjust and select the tilt angle of the back just pull out the handle underneath of the seat **(B)**.



Tension Control Knob



4 Back tilt positions control

2 AIR COMFORT SYSTEM

The seat has been designed with air chambers, to improve comfort, flexibility and the distribution of pressure for any user.




3 SEAT HEIGHT ADJUSTMENT

The seat height is adjusted using a gas-lift by lifting up the knob under the seat **(C)**. (Lowest seat height: 39 cm / Maximum seat height: 50 cm).



seat height

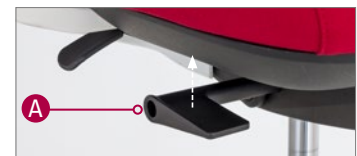

Gas lift - Syncro Model




Gas lift - Gas lift Model

4 SEAT SLIDE (TRASLA)

Ideal feature to adjust the distance between the seat and the back adapting the chair to different user anthropometrics.

Pull out the lever **(D)** and fix it back in **8 different positions**. The system includes a self-return mechanism to return the seat to the initial position when standing up by pulling the lever.

(total sliding distance = 7 cm / Each position offers 10 mm adjustment).



7 different positions. Depth adjustment with self-return mechanism



Sliding seat lever

5 ADAPTATIVE LUMBAR

EFIT incorporates an adaptative **lumbar section (E)** integrated in the backrest adapting to user's back's shape.



Flexible integrated lumbar support.

7 ADJUSTABLE ARMREST


EFIT has 2 different arm options: aluminium or PP.

Height adjustment: adjustable using the knob under the arm-rest (**F**), it offers 7 height positions.

Distance between arms: Width adjustment using the handle under the seat (**G**), each arm can be adjusted 2,5 cm, so maximum total adjustment is 5 cm.

360° Swivel arm system (Anti-panic): Only available with the aluminium arm option, 360° Swivel armrest movement allowing horizontal rotation of arm rests. Incorporation of a panic trigger in the aluminum arms (H**).**

POLYPROPYLENE




Height adjustable arm




Distance between arms


ALUMINIUM ARM / POLYPROPYLENE




360° Swivel arm movement




Height adjustable arm




Distance between arms



360° Swivel arm movement



LOCKED - without movement
(Only in positions 0° and 180°)



UNLOCKED - with movement

8 CASTORS AND GLIDES

POLYAMIDE BASE

Polyamide (PAG + 30% F.G.) Arms




ALUMINIUM BASE

Polyamide (PA) Arms
Aluminium Arms



POLYAMIDE BASE FINISHES



Black White

ALUMINIUM BASE FINISHES



White Black Polished

STANDARD CASTORS

All chairs include as standard soft castors with Teflon band which allows an easy and light movement of the chair.



STANDARD CASTORS

- Silent teflon band.
- Black finish.
- 65mm diameter
- No self-locking.

OPTIONAL CASTORS

Self-Locking castors are popular as they are in line with most of the security restrictions required on projects. They avoid accidental movement of the chair and they only have a small disadvantage as the chairs is not easy to slide when no weight is on it. While sat on the chair, the chair moves easily with no resistance.



AUTO-BREAKING CASTORS

This system provides security as it avoids accidental movement of the chair. While sat on the chair, it moves easily.



ANTISTATIC CASTORS



AUTO-BREAKING HOLE CASTORS


This system provides security as it avoids accidental movement of the chair. While sat on the chair, it moves easily. It includes a system to unlock the breaking system to use these castors just as an aesthetic option.



POLYPROPYLENE GLIDES

■ BACKREST AND SEAT


Fabric T - Phoenix



Fabric D - Felicity



Fabric M - Melang & Step



■ **DESCRIPTION**

- ① Backrest, PP with glass fibre (PP + 15% G.F.) frame. It also incorporates several splines for better back breathing. Flexible moulded polyurethane foam, upholstered with different fabrics. 2 backrest models: High backrest and Standard Backrest
- ② Adaptative lumbar support
- ③ **2D Adjustable arms:** Height and width adjustment. Available in PP structure.
3D Adjustable arms: Height and width adjustment. 360° Swivel armrest movement. Available in aluminium or polypropylene structure.
- ④ Seat with **ACS technology (airflow comfort system)**. Made of PU (polyurethane) flexible moulded foam (density 50-60 kg/m³). Upholstered seat available in a wide range of fabrics.
- ⑤ Gas lift
- ⑥ Synchro mechanism. 4 back tilt positions
- ⑦ Seat slide (Trasla)
- ⑧ 5 star base. Die cast aluminium or P.A.G. +30% G.F.
- ⑨ Several castors or caps available



■ **BACKREST AND SEAT**

(PLEASE SEE FINISHES AND FABRIC ON THE PREVIOUS PAGE)

■ **BASES AND CASTORS**



Polyamide - Ø 67,5 cm
Silent black castor - Ø 65 mm
FINISHES
Black and White



Aluminum injection - Ø 67,5 cm
Silent black castor - Ø 65 mm
FINISHES
White, Black and Polished.


OPTIONAL ACCESSORIES



■ **DIMENSIONS**


Standard Backrest

Total height: from 910 to 1010 mm Seat height: from 460 to 560 mm
Total width: 675 to 690 mm Seat width: 460 to 510 mm
Total depth: 675 mm Seat depth: from 470 to 540 mm

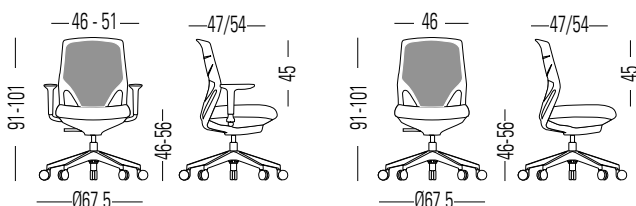

High backrest

Total height: from 970 to 1070 mm Seat height: from 460 to 560 mm
Total width: 675 to 690 mm Seat width: 460 to 510 mm
Total depth: 675 mm Seat depth: from 470 to 540 mm

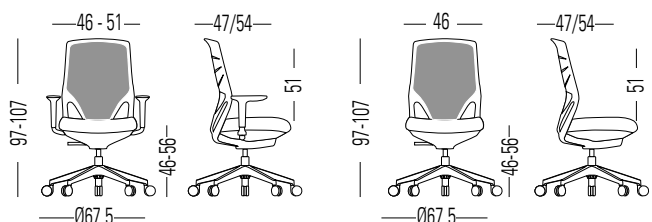

■ **DESCRIPTION**

- ① Backrest, PP with glass fibre (PP + 15% G.F.) frame. It also incorporates several splines for better back breathing.
2 backrest models: High backrest and Standard Backrest
- ② Adaptative lumbar support
- ③ **2D Adjustable arms:** Height and width adjustment. Available in polyamide structure.
3D Adjustable arms: Height and width adjustment. 360° Swivel armrest movement. Available in aluminium or polypropylene structure.
- ④ Seat with **ACS technology (airflow comfort system)**. Made of PU (polyurethane) flexible moulded foam (density 50-60 kg/m³). Upholstered seat available in a wide range of fabrics.
- ⑤ Gas lift
- ⑥ Synchro mechanism. 4 back tilt positions
- ⑦ Seat slide (Trasla)
- ⑧ 5 star base. Die cast aluminium or P.A.G. +30% G.F.
- ⑨ Several castors or caps available

■ **BACKREST AND SEAT**

(PLEASE SEE FINISHES AND FABRIC ON THE PREVIOUS PAGE)

■ **BASES AND CASTORS**



Polyamide - Ø 67,5 cm
Silent black castor - Ø 65 mm
FINISHES
Black and White



Aluminum injection - Ø 67,5 cm
Silent black castor - Ø 65 mm
FINISHES
White, Black and Polished.




OPTIONAL ACCESSORIES



■ **DIMENSIONS**


Standard Backrest

Total height: from 910 to 1010 mm Seat height: from 460 to 560 mm
Total width: 675 to 690 mm Seat width: 460 to 510 mm
Total depth: 675 mm Seat depth: from 470 to 540 mm

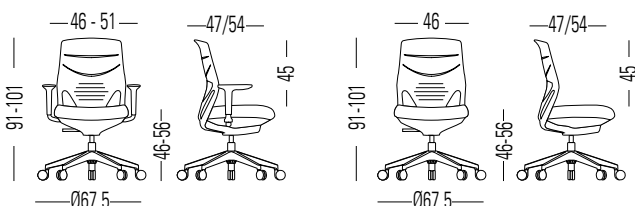

High backrest

Total height: from 970 to 1070 mm Seat height: from 460 to 560 mm
Total width: 675 to 690 mm Seat width: 460 to 510 mm
Total depth: 675 mm Seat depth: from 470 to 540 mm

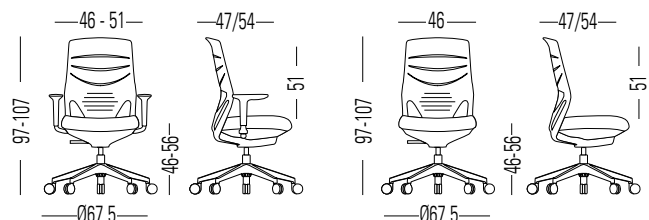

■ **DESCRIPTION**

- ① Backrest, PP with glass fibre (PP + 15% G.F.) frame. It also incorporates several splines for better back breathing.
Model with low backrest
- ② Adaptative lumbar support
- ③ **2D Adjustable arms:** Height and width adjustment. Available in polyamide structure.
3D Adjustable arms: Height and width adjustment. 360° Swivel armrest movement. Available in aluminium or polypropylene structure.
- ④ Seat with **ACS technology (Air Comfort System)**. Made of PU (polyurethane) flexible moulded foam (density 50-60 kg/m³). Upholstered seat available in a wide range of fabrics.
- ⑤ Gas lift
- ⑥ Synchro mechanism. 4 back tilt positions
- ⑦ Seat slide (Trasla)
- ⑧ Chromed steel footrest - Ø50cm. Curved tube Ø 18 mm, 1,5 mm thickness
- ⑨ 5 star base. Die cast aluminium or P.A.G. +30% G.F.
- ⑩ Inverted auto-break black castor - Ø 6,5 cm



■ **BACKREST AND SEAT**

(PLEASE SEE FINISHES AND FABRIC ON THE PREVIOUS PAGE)

■ **BASES AND CASTORS**



Polyamide - Ø 67,5 cm
Inverted auto-break black castor - Ø 60 mm
FINISHES: Black and White



Aluminum injection - Ø 67,5 cm
Inverted auto-break black castor - Ø 60 mm
FINISHES: White, Black and Polished.

■ **OPTIONAL ACCESSORIES**




POLYPROPYLENE GLIDES

■ **DIMENSIONS**

Total height: from 1.065 mm to 1.225 mm
Total width: 675 mm
Total depth: 675 mm


Seat height: from 685 mm to 845 mm
Seat width: from 460 mm to 510 mm
Seat depth: from 470 mm to 540 mm

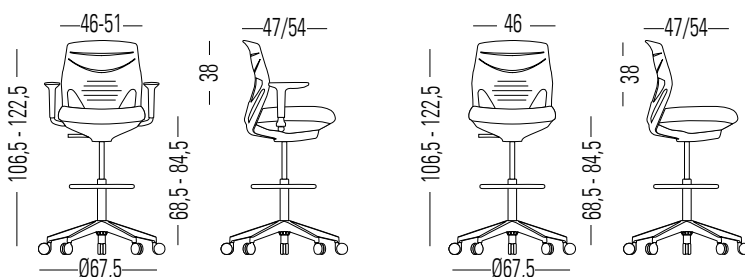

1 A correct posture at work to avoid physical problems


Seat adjustment.

Forearms must be parallel to the desk top as in a right angle with the rest of the arm. Both feet must be lean on the floor and knees must be in right angle too.




Adaptative Lumbar

EFIT incorporates an adaptative lumbar section integrated in the backrest adapting to user's back's shape.



Adjustable arms (7 positions)

Place the chair arms in the lower position to get better mobility. For statics works, adjust height and distance to that point where the forearms perfectly lean.



2 Different ergonomics conditions and specific movements for each task

It is necessary to alternate daily dynamic and static tasks.


Dynamic tasks.

Document manipulation, communication and so on...Select positions 2,3 or 4 on the back tilt adjustment knob. Put the arms in the lowest position.


Torsion.

Flexible back. Movements go naturally with the user action.

Dynamic tasks.




Torsion.



3 Incorrect Postures

Key points.

1. A lower position from the desk produces neck pain.
2. An incorrect back support may produce back problems.
3. Legs too stretched or too vended may cause over-stressed body joints.

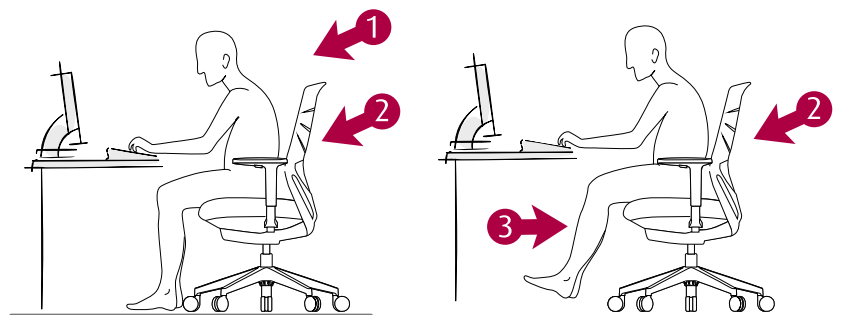



MATERIALS

Maximum use of materials to eliminate and minimize scraps. Use of recyclable and recycled materials in those components that do not affect the functionality and durability.

SERIE 10/40 **34,87%**
 SERIE 50 **33,42%**
 RECYCLABLE MATERIALS



PRODUCTION

Maximum optimization of energy use. Minimal environmental impact. Last generation technological systems. Zero discharge of wastewater. No VOC coatings. Processes free of heavy metals, phosphates, OC and COD.

100%
 RECYCLABLE
 ALUMINIUM, STEEL & WOOD



TRANSPORT

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.

100%
 RECYCLABLE
 PACKAGE AND THINNER FREE



USE

Quality and warranty. Long lasting. Replacements available.

EASY
 TO CLEAN AND MAINTAIN



DISPOSAL

Waste reduction. Supplier-manufacturer packaging reuse system. Components are easy to be separated. Inks in packaging are water-based, without solvents.

SERIE 10/40 **84,31%**
 SERIE 50 **51,63%**
 RECYCLABLE MATERIALS

■ **CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).



■ **STANDARDS**

EFIT has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture. The tests correspond to:

Office chairs, Standard from 2009

- **UNE-EN 1335-1:01.** Office furniture. Office chair. Part 1: About dimensions
- **UNE-EN 1335-2:09.** Office furniture. Office chair. Part 2: Security requirements
- **UNE-EN 1335-3:09.** Office furniture. Office chair. Part 3: Security tests.
- **UNE EN ISO 14006: 2019.** Environmental management system. Guidelines for incorporating ecodesign.